



## Heavy Structure with Galvanised Finish

Double deck design, which can protect the inner part of the bars from soil, manure, etc., protect the load cells and maintain a high weighing accuracy for a long term. It's ideal to weigh under the platforms, alleyways, crates, crushes, etc.

The galvanized finish can gives the best quality for long term durability in harsh enviornment, and top plate with another layer of plastic powder coating.

There are four fixing holes on the bottom plate, which can be installed temporarily or permanently.







It's compatible with our FOX indicators without calibration, and also it compatible with most other professional indicators.

Hi Ranche

....

NARASAN DA


(with load cell connectors Amphonel ordered, span calibration needed or customized pre-calibration).

## Heavy Capacity up to 3,000kg | 6,600lb

4 lengths for selection: 400mm, 600mm, 800mm or 1000mm, also customized length available. 5,000kg | 11,000lb model optional

## Hi Rancher**S**



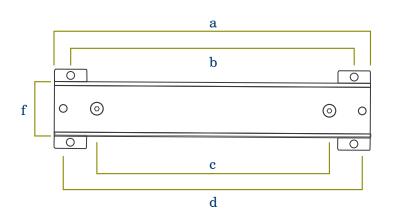

Models	a	b	с	d	е	f
ABH400	400	340	242.4	368	90.3	100
ABH600	600	540	442.4	568	90.3	100
ABH800	800	740	642.4	768	90.3	100
ABH1000	1000	940	842.4	968	90.3	100

## **Specifications**

Part No.	170001	170002	170003	170004			
Models	ABH400	ABH600	ABH800	ABH1000			
Length	400mm I 16"	600mm I 24"	800mm I 32"	1000mm I 39"			
Capacity	2000kg	1 4400lb	3000kg l 6600lb				
Resolution	0.2kg l 0.5lb		0.5kg l 1.0lb				
Platform Fixing Centers	368mm	568mm	768mm	968mm			
Bar Width	100mm I 3.9"						
Height	90mm I 3.5"						
Weight	20kg	23kg	26kg	32kg			
Cable Length	5m						
Cable Type	4-wire PVC+PUR cable with stainless steel spring cover, protection from sunlight, oil, cold, rolling and rodents						
Load Cell Type	Alloy steel shear beam						
Accuracy	+/-1%F .s. or 2d						
Operating Temperature	-10 to +40°C						
Selection Guide		Under a platform I Alleyway I Crate I Woolpress Squeeze chute I Cattle crush					







.....



3